

NEW PRODUCT!



200 SQPB

EBARA Self Priming Pump

FEATURES

- No priming is required excepting for initial use.
- Special designed casing provides very rapid priming for extended piping.
- Maintenance is facilitated due to packing type.
- Water mixed with a little sand or mud can be pumped up due to semi - open impeller design.
- Easy installation with engine for belt driven due to c.c.w rotation.

SPEIFICATION

Liquid: River water and Fresh water (Optional : Sea Water)

Temperature: 0 - 40 C

Rotation: Counter clock wise when viewed from drive end

Installation: Outdoors

Material;


- Casing : Cast Iron (Optional : Bronze)
- Impeller : Cast Iron (Optional : Bronze)
- Shaft : Carbon Steel (Optional : Stainless Steel)

Contruction;

- Impeller : Semi Open
- Stuffing Box : Packing
- Bearing : Sealed Ball Bearing

Accessories: Strainer, Discharge Elbow, Hose Clamp, suction Hose Nipple, Standard V - Pulley

APPLICATION

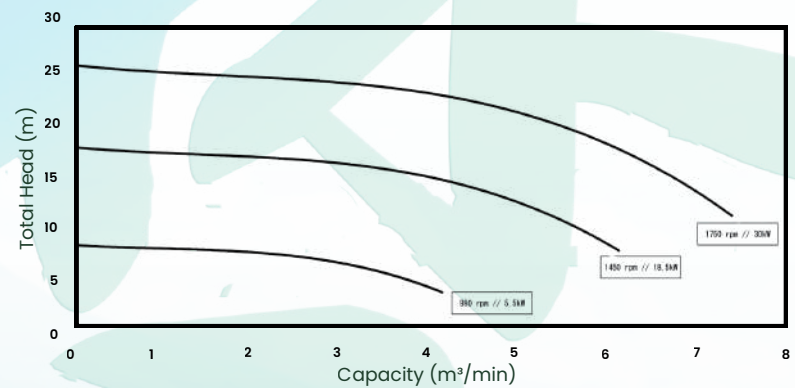

Capacity	RPM	Daya Motor
Up to 6m ³ /min	1750 rpm (50Hz)	30kW
	1450 rpm (50Hz)	18.5kW
	980rpm (50Hz)	5.5kW

